


PRODUCT DESCRIPTION

Galvanized metal lath is manufactured from prime quality steel sheets that are slit and expanded to form small diamond shaped openings. The large number of openings provides a superior substrate for bonding of ISOLATEK Type M-II, ISOLATEK Type TG, or ISOLATEK Type M-II/P cementitious fireproofing materials. All sheets are flat 2464 mm x 688 mm rectangles with square ends and smooth parallel edges on the sides for fast easy handling. Sheets are rigid yet bendable for both box and contour designs.

PRODUCT ADVANTAGES

- Used as mechanical reinforcement for ISOLATEK SFRMs
- Small mesh openings conserve fireproofing and reduce waste
- Minimizes stress cracks by maintaining consistent material depths
- Excellent for boxed and contour designs
- Available in 1.8 kilograms per square meter
- Meets Specifications ASTM C846, ASTM C1063 and ASTM A653

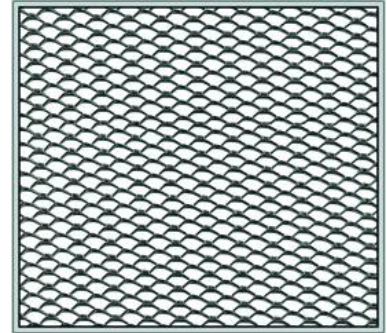

Technical Data	
Material	Galvanized Steel
Finish	G-60
Sheet Size	(L) 2464 mm x (W) 688 mm (L) 27 in. x (W) 97 in.
Weight	1.8 kg/m ² (3.4 lbs/yd ²)

Packaging/Storage	
Pcs/Bundle	10
Bundle/Pallet	50



ISOLATEK INTERNATIONAL is registered with the
AIA Continuing Education System (AIA/CES)



We support our customers with unsurpassed technical expertise and customer service, complemented by an extensive global network of experienced sales representatives and recognized applicators. For detailed product information or for the name of the sales representative in your area please contact us.

The performance data herein reflect our expectations based on tests conducted in accordance with recognized standard methods under controlled conditions. The applicator, general contractor, property owner and/or user **MUST** read, understand and follow the directions, specifications and/or recommendations set forth in Isolatek International's publications concerning use and application of these products, and should not rely merely on the information contained in this product data sheet. Isolatek International is not responsible for property damage, bodily injuries, consequential damages, or losses of any kind that arise from or are related to the applicator's, general contractor's, or property **owners'** failure to follow the recommendations set forth in Isolatek International's publications. The sale of these products shall be subject to the Terms and Conditions set forth in the Company's invoices.

Isolatek International provides passive fireproofing materials under the CAFCO®
trademark throughout the Americas and other markets and under the
ISOLATEK® trademark throughout the world.

+1 973.347.1200
www.isolatek.com | technical@isolatek.com

ISOLATEK®
Brand